



INDUSTRIAL & COMMERCIAL

2023

PRODUCT CATALOG



airkinglimited.com

TABLE OF CONTENTS

| | | | |
|--|-----------|------------------------------------|-----------|
| <i>Introduction</i> | <i>2</i> | <i>Commercial Pedestal Fans</i> | <i>11</i> |
| <i>Industrial Grade Drum Fans</i> | <i>3</i> | <i>Commercial Wall Mount Fans</i> | <i>11</i> |
| <i>1/3 HP Industrial Grade Air Circulators</i> | <i>4</i> | <i>Commercial Table Fans</i> | <i>12</i> |
| <i>1/4 HP Industrial Grade Air Circulators</i> | <i>5</i> | <i>Commercial Pivot Fans</i> | <i>12</i> |
| <i>Industrial Grade Quiet Fans</i> | <i>6</i> | <i>Commercial Box Fan</i> | <i>13</i> |
| <i>Industrial Grade Floor Fans</i> | <i>7</i> | <i>Commercial Office Fans</i> | <i>13</i> |
| <i>20" and 18" Industrial Grade Fans</i> | <i>8</i> | <i>Commercial Pivoting Blowers</i> | <i>14</i> |
| <i>Industrial Grade Multi Mount Fans</i> | <i>9</i> | <i>Window Fans</i> | <i>14</i> |
| <i>Government Fans</i> | <i>10</i> | <i>Index</i> | <i>15</i> |



What is the Best Fan for What I Need?

Drum Fans: Portable, large air volume movers, perfect for large spaces or drying wet surfaces

Pedestal Fans: Portable air circulation perfect for larger areas

Wall Mount Fans: Mounted fan perfect for areas where floor space is limited, able to mount closer to people/work stations

Ceiling Mount Fans: Mounted fan, perfect for areas where floor space is limited, generally mounted higher than wall mount fans and provide larger areas of air circulation

I-Beam Mount Fans: Mounted fan, perfect for areas where floor space is limited, generally mounted higher than wall mount fans and provide larger areas of air circulation

Floor Fans: Quick and easy portable air circulation solution, great for areas that need temporary cooling

Multi Mount Fans: Mounted fan perfect for smaller spaces such as loading docks or smaller production lines

Utility Blowers: Ultra portable fans perfect for job sites

Window Fans: Seasonal fans great for home or small business usage

VALUE, QUALITY, AND SERVICE

As a leading supplier of Industrial and Commercial Grade Air Circulators, Air King is recognized throughout the industry for the superior quality and performance of its products. Our four North American manufacturing facilities ensure every Air King fan is precision-designed, engineered, and tested to meet the high standards our customers have come to expect. We strive every day to exceed our customers' expectations for Value, Service and Quality. Our product design team is constantly working to develop new products to meet the changing needs of today's market place while also keeping our existing products the leader's in the industry. In this way Air King ensures that our customers are always offered the right product at the right price.

PRODUCTS THAT EXCEED YOUR EXPECTATIONS

From Industrial to Commercial Grade fans, Wall Mounts to Pivoting Air Circulators, Air King offers a full line of fans to meet your needs for the workplace. Every Air King fan features a permanently lubricated motor to provide maintenance-free operation and are rigorously tested prior to shipping to provide high volume air movement with years of trouble-free operation. Every fan features a three-wire grounded plug and cord, and fan guards that meet with OSHA requirements. Air King warrants motors for three years, all other fan parts have a one year warranty.

THE AIR KING DIFFERENCE

Customer service is a title that everyone in our company shares. From our corporate staff to our nationwide network of manufacturer's representatives, we are dedicated to making sure your questions are addressed and answered quickly and accurately.



INDUSTRIAL-GRADE DRUM FANS

Common Usages

- Move a high volume of air in large areas economically
- Move air over wet surfaces including poured concrete to facilitate drying
- Move air in warehouse, gyms, and more



FEATURES

- 2-speed, 1/2 HP, 120V, ball bearing, permanently lubricated, permanent split capacitor, 1 phase motor
- Side mounted switch
- Steel construction
- Wheels and carry handle for mobility
- 10', 3-conductor cordset



Direct Drive
9236D



SPECIFICATIONS

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | PRODUCT DIMENSIONS | WEIGHT (LBS.) | CUBE (FEET) | LIST PRICE |
|-------|---------------------------|-----|------------|-------------|----------------|------------|----------------------|---------------|-------------|------------|
| 9236D | 36" Direct Drive Drum Fan | 1/2 | 36" | Side Switch | Black, 10' SJT | ETL, OSHA | 38"L x 16"W x 40.5"H | 61.0 | 14.25 | \$1044.00 |

PERFORMANCE

| MODEL | TYPE | SPEEDS | VOLTS | PHASES | BEARINGS | CFM | | RPM | | AMPS | | WATTS | | DB A | |
|-------|------------|--------|-------|--------|----------------|-------|------|------|-----|------|------|-------|-----|------|-----|
| | | | | | | HIGH | LOW | HIGH | LOW | HIGH | LOW | HIGH | LOW | HIGH | LOW |
| 9236D | 36" 1/2 HP | 2 | 120 | Single | Enclosed, Ball | 10900 | 7850 | 1120 | 805 | 6.60 | 5.70 | 725 | 565 | 78 | 66 |

Specifications are subject to change.



1/3 HP INDUSTRIAL GRADE AIR CIRCULATORS

Common Usages

- Cool employees on lines or in clustered workstations
- Cool machinery in production facilities
- Direct heat and fumes away from employees
- General air circulation of larger areas



FEATURES

- 1/3 HP designed to run cooler than less powerful fans, extends motor life
- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel
- Multiple mounting options available

Oscillation vs Non-Oscillation

- Oscillating fans distribute air over a larger area
- Non-Oscillating fans will be more effective cooling specific areas/people



Secondary support cable included on Wall, Ceiling, and I-Beam Mount models.


Fans are shipped unassembled in one UPS shippable carton



24" models utilize our traditional rectangular designed fan blade

Pedestal

9170, 9175, 9171, 9174

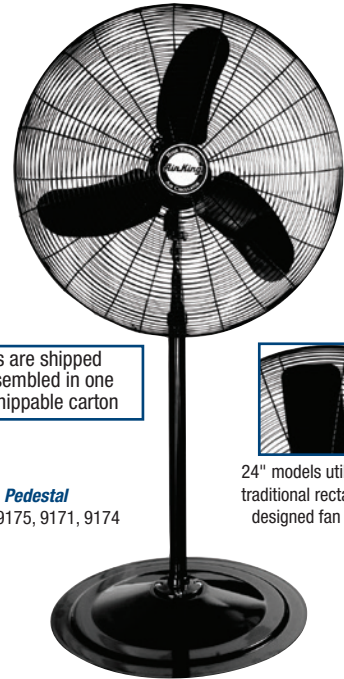

Wall Mount

9070, 9075, 9071, 9074



Ceiling Mount

9370, 9375, 9374



I-Beam Mount

9670

SPECIFICATIONS

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | HEIGHT ADJUSTMENT | PRODUCT DIMENSIONS | WEIGHT (LBS.) | CUBE (FEET) | LIST PRICE |
|-------|-----------------------------------|-----|------------|-----------|----------------|------------|-------------------|-----------------------------|---------------|-------------|------------|
| 9170 | 30" Pedestal Fan | 1/3 | 30" | Pull Cord | Black, 10' SJT | ETL, OSHA | 54.75" - 79" | 33.5"L x 29"W x 79"H | 80.0 | 6.03 | \$762.00 |
| 9175 | 30" Oscillating Pedestal Fan | | | | | | 56" - 81" | 33.5"L x 29"W x 81"H | 82.6 | 6.03 | \$802.00 |
| 9171 | 24" Pedestal Fan | 1/3 | 24" | Pull Cord | Black, 10' SJT | ETL, OSHA | 53" - 76.5" | 27"L x 29"W x 76.5"H | 73.5 | 8.26 | \$730.00 |
| 9174 | 24" Oscillating Pedestal Fan | | | | | | 55" - 78.5" | 27"L x 29"W x 78.5"H | 76.1 | 8.26 | \$764.00 |
| 9070 | 30" Wall Mounted Fan | 1/3 | 30" | Pull Cord | Black, 10' SJT | ETL, OSHA | - | 33.75"L x 25.75"W x 38.75"H | 44.9 | 6.03 | \$654.00 |
| 9075 | 30" Oscillating Wall Mount Fan | | | | | | - | 33.75"L x 25.75"W x 38.75"H | 46.6 | 6.03 | \$688.00 |
| 9071 | 24" Wall Mounted Fan | 1/3 | 24" | Pull Cord | Black, 10' SJT | ETL, OSHA | - | 26.75"L x 25"W x 34.5"H | 38.4 | 8.26 | \$654.00 |
| 9074 | 24" Oscillating Wall Mount Fan | | | | | | - | 26.75"L x 25"W x 34.5"H | 40.1 | 8.26 | \$656.00 |
| 9370 | 30" Ceiling Mounted Fan | 1/3 | 30" | Pull Cord | Black, 10' SJT | ETL, OSHA | - | 33.5"L x 29"W x 36.75"H | 42.9 | 6.03 | \$722.00 |
| 9375 | 30" Oscillating Ceiling Mount Fan | | | | | | - | 33.5"L x 29"W x 36.75"H | 44.9 | 6.03 | \$764.00 |
| 9374 | 24" Oscillating Ceiling Mount Fan | 1/3 | 30" | Pull Cord | Black, 10' SJT | ETL, OSHA | - | 27"L x 29"W x 33.63"H | 38.4 | 8.26 | \$789.00 |
| 9670 | 30" I-Beam Mounted Fan | 1/3 | 30" | Pull Cord | Black, 10' SJT | ETL, OSHA | - | 42"L x 33"W x 44"H | 77.3 | 6.03 | \$894.00 |

PERFORMANCE

| TYPE | SPEEDS | VOLTS | PHASES | BEARINGS | CFM | | | RPM | | | AMPS | | | WATTS | | | DB A | | |
|-------------------------|--------|-------|--------|----------------|------|------|------|------|-----|-----|------|------|------|-------|-----|-----|------|-----|-----|
| | | | | | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW |
| 30" 1/3 HP ¹ | 3 | 120 | Single | Enclosed, Ball | 8780 | 7480 | 5570 | 1075 | 925 | 800 | 2.80 | 2.00 | 1.65 | 308 | 205 | 170 | 72 | 70 | 64 |
| 24" 1/3 HP ² | 3 | 120 | Single | Enclosed, Ball | 5770 | 5250 | 4270 | 1054 | 869 | 673 | 2.50 | 1.96 | 1.40 | 332 | 226 | 152 | 69 | 67 | 59 |

¹ Includes models 9170, 9175, 9070, 9075, 9370, 9375, 9670, 9675 • ² Includes models 9171, 9174, 9071, 9074, 9374
 Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



1/4 HP INDUSTRIAL GRADE AIR CIRCULATORS

Common Usages

- Cool employees on lines or in clustered workstation
- Cool machinery in production facilities and direct heat and fumes away from employees
- General air circulation of larger areas



FEATURES

- 1/4 HP motor has lower operational cost than higher HP motors
- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel
- Multiple mounting options available


Oscillation vs Non-Oscillation

- Oscillating fans broadcast air over a larger area
- Non-Oscillating fans will be more effective cooling specific areas/people




Secondary support cable included on Wall, Ceiling, and I-Beam Mount models.

Fans are shipped unassembled in one UPS shippable carton

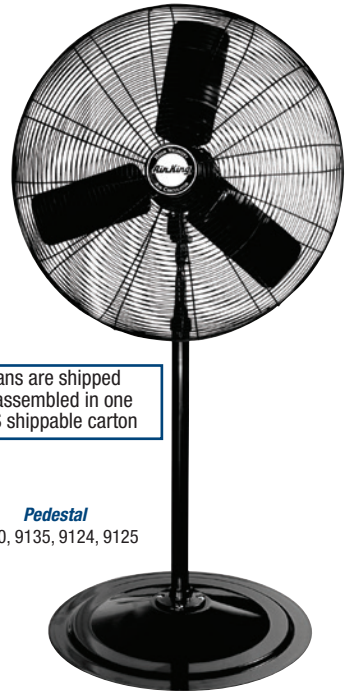

Pedestal
9130, 9135, 9124, 9125



Wall Mount
9030, 9035, 9024, 9025



Ceiling Mount
9330, 9335



I-Beam Mount
9430, 9635, 9424

SPECIFICATIONS

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | HEIGHT ADJUSTMENT | PRODUCT DIMENSIONS | WEIGHT (LBS.) | CUBE (FEET) | LIST PRICE |
|-------|-----------------------------------|-----|------------|-----------|----------------|------------|-------------------|-----------------------------|---------------|-------------|------------|
| 9130 | 30" Pedestal Fan | 1/4 | 30" | Pull Cord | Black, 10' SJT | ETL, OSHA | 54.75" - 79" | 33.5"L x 29"W x 79"H | 80.0 | 6.03 | \$720.00 |
| 9135 | 30" Oscillating Pedestal Fan | | | | | | 56" - 81" | 33.5"L x 29"W x 81"H | 82.6 | 6.03 | \$758.00 |
| 9124 | 24" Pedestal Fan | 1/4 | 24" | Pull Cord | Black, 10' SJT | ETL, OSHA | 53" - 76.5" | 27"L x 29"W x 76.5"H | 73.5 | 8.26 | \$684.00 |
| 9125 | 24" Oscillating Pedestal Fan | | | | | | 55" - 78.5" | 27"L x 29"W x 78.5"H | 76.1 | 8.26 | \$730.00 |
| 9030 | 30" Wall Mounted Fan | 1/4 | 30" | Pull Cord | Black, 10' SJT | ETL, OSHA | - | 33.75"L x 25.75"W x 38.75"H | 44.9 | 6.03 | \$612.00 |
| 9035 | 30" Oscillating Wall Mount Fan | | | | | | - | 33.75"L x 25.75"W x 38.75"H | 46.6 | 6.03 | \$654.00 |
| 9024 | 24" Wall Mounted Fan | 1/4 | 24" | Pull Cord | Black, 10' SJT | ETL, OSHA | - | 26.75"L x 25"W x 34.5"H | 38.4 | 8.26 | \$574.00 |
| 9025 | 24" Oscillating Wall Mount Fan | | | | | | - | 26.75"L x 25"W x 34.5"H | 40.1 | 8.26 | \$618.00 |
| 9330 | 30" Ceiling Mounted Fan | 1/4 | 30" | Pull Cord | Black, 10' SJT | ETL, OSHA | - | 33.5"L x 29"W x 36.75"H | 42.9 | 6.03 | \$688.00 |
| 9335 | 30" Oscillating Ceiling Mount Fan | | | | | | - | 33.5"L x 29"W x 36.75"H | 44.9 | 6.03 | \$722.00 |
| 9430 | 30" I-Beam Mounted Fan | 1/4 | 30" | Pull Cord | Black, 10' SJT | ETL, OSHA | - | 42"L x 33"W x 44"H | 77.3 | 6.03 | \$852.00 |
| 9635 | 30" Oscillating I-Beam Mount Fan | | | | | | - | 42"L x 33"W x 44"H | 81.7 | 6.03 | \$896.00 |
| 9424 | 24" I-Beam Mounted Fan | 1/4 | 24" | Pull Cord | Black, 10' SJT | ETL, OSHA | - | 41"L x 27"W x 41"H | 70.8 | 8.26 | \$816.00 |

PERFORMANCE

| TYPE | SPEEDS | VOLTS | PHASES | BEARINGS | CFM | | | RPM | | | AMPS | | | WATTS | | | DB A | | |
|-------------------------|--------|-------|--------|----------------|------|------|------|------|-----|-----|------|------|------|-------|-----|-----|------|-----|-----|
| | | | | | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW |
| 30" 1/4 HP ¹ | 3 | 120 | Single | Enclosed, Ball | 7400 | 6360 | 4980 | 1040 | 902 | 860 | 2.40 | 1.86 | 1.46 | 255 | 200 | 154 | 75 | 71 | 67 |
| 24" 1/4 HP ² | 3 | 120 | Single | Enclosed, Ball | 5130 | 4490 | 3670 | 1060 | 925 | 745 | 2.39 | 1.86 | 1.52 | 252 | 199 | 157 | 72 | 69 | 64 |

¹ Includes models 9130, 9135, 9030, 9035, 9330, 9335, 9430, 9635 • ² Includes models 9124, 9125, 9024, 9025, 9424
Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



INDUSTRIAL-GRADE QUIET FANS

Common Usages

Areas in need of quiet air circulation
Churches, banquet halls, locker rooms,
music venues, schools, auditoriums and more



FEATURES

- Quiet speed allows the fan to operate at a reduced sound level, while still delivering powerful air circulation
- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel

PEDESTALS


- Specially designed base reduces noise transfer
- 90° oscillation broadcasts air over a larger area
- Adjustable height: 55" - 80.75" (99532)
52" - 77.75" (99533)

WALL MOUNTED

- Specially designed wall mount reduces noise transfer
- 90° oscillation broadcasts air over a larger area


FLOOR

- Pivoting action allows fan to be easily directed to needed area

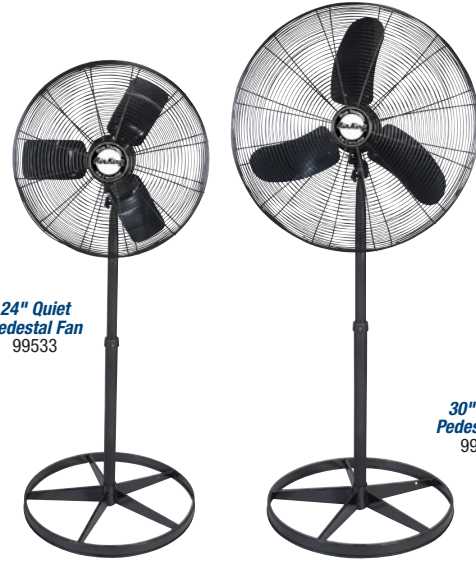


24" Quiet
Pedestal Fan
99533


30" Quiet
Pedestal Fan
99532



24" Quiet
Wall Mount
Fan
99539



30" Quiet
Wall Mount
Fan
99538



24" Quiet
Floor Fan
99222



SPECIFICATIONS

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | PRODUCT DIMENSIONS | WEIGHT (LBS.) | CUBE (FEET) | LIST PRICE |
|-------|---------------------------------------|-----|------------|-----------|----------------|------------|---------------------------|---------------|-------------|------------|
| 99532 | 30" Quiet, Oscillating Pedestal Fan | 1/4 | 30" | Pull Cord | Black, 10' SJT | ETL, OSHA | 33.5"L x 33.5"W x 80.75"H | 70.0 | 6.03 | \$884.00 |
| 99533 | 24" Quiet, Oscillating Pedestal Fan | 1/4 | 24" | Pull Cord | Black, 10' SJT | ETL, OSHA | 29.5"L x 29.5"W x 77.75"H | 66.4 | 8.26 | \$864.00 |
| 99538 | 30" Quiet, Oscillating Wall Mount Fan | 1/4 | 30" | Pull Cord | Black, 10' SJT | ETL, OSHA | 33.5"L x 24"W x 33.5"H | 53.5 | 6.03 | \$708.00 |
| 99539 | 24" Quiet, Oscillating Wall Mount Fan | 1/4 | 24" | Pull Cord | Black, 10' SJT | ETL, OSHA | 27"L x 24"W x 27"H | 49.5 | 8.26 | \$690.00 |
| 99222 | 24" Quiet, Floor Fan | 1/4 | 24" | Rotary | Black, 8' SO | ETL, OSHA | 27"L x 12"W x 28.75"H | 39.9 | 5.69 | \$668.00 |

PERFORMANCE

| TYPE | SPEEDS | VOLTS | PHASES | BEARINGS | CFM | | | RPM | | | AMPS | | | WATTS | | DB A | | | |
|--------------|--------|-------|--------|----------------|------|------|-------|------|-----|-------|------|------|-------|-------|-----|-------|------|-----|-------|
| | | | | | HIGH | MED | QUIET | HIGH | MED | QUIET | HIGH | MED | QUIET | HIGH | MED | QUIET | HIGH | MED | QUIET |
| 99532, 99538 | 3 | 120 | Single | Enclosed, Ball | 7450 | 6090 | 3450 | 1010 | 860 | 530 | 2.20 | 1.60 | 0.60 | 245 | 185 | 70 | 68 | 64 | 50 |
| 99533, 99539 | 3 | 120 | Single | Enclosed, Ball | 5030 | 4320 | 2280 | 1025 | 880 | 480 | 2.00 | 1.60 | 0.60 | 250 | 190 | 70 | 69 | 65 | 48 |
| 99222 | 3 | 120 | Single | Enclosed, Ball | 5030 | 4320 | 2280 | 1025 | 880 | 480 | 1.80 | 1.50 | 1.00 | 210 | 175 | 105 | 69 | 65 | 48 |

* Decibels (DBA) on quiet speed is at least 10 decibels less than traditional fans. An increase of 10 decibels is perceived to be approximately twice as loud. Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



INDUSTRIAL GRADE FLOOR FANS

Common Usages

Areas in need of portable air circulation such as restaurants, workstations, music venues, garages and more

12" - 14" for individual workstation

18" and above for multiple workstations




FEATURES


- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel
- Pivoting action allows fan to be easily directed to needed area
- Roll-About stand elevates fan to desired height (26" and 28" heights)
- Multiple sizes available



Pivoting Floor Fan
9214, 9212



Pivoting Floor Fan
9220, 9218



Pivoting Floor Fan
9230, 9224



Roll-About Stand w/Fan
9219

SPECIFICATIONS

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | PRODUCT DIMENSIONS | WEIGHT (LBS.) | CUBE (FEET) | LIST PRICE |
|-------|----------------------------|------|------------|----------|---------------|------------|----------------------------|---------------|-------------|------------|
| 9230 | 30" Pivoting Floor Fan | 1/4 | 30" | Rotary | Black, 10' SO | ETL, OSHA | 33.75"L x 12.25"W x 35.5"H | 48.3 | 8.63 | \$640.00 |
| 9224 | 24" Pivoting Floor Fan | 1/4 | 24" | Rotary | Black, 10' SO | ETL, OSHA | 27"L x 12"W x 28.75"H | 41.8 | 5.69 | \$596.00 |
| 9220 | 20" Pivoting Floor Fan | 1/6 | 20" | Rotary | Black, 8' S | ETL, OSHA | 25.75"L x 12.5"W x 25"H | 24.0 | 4.46 | \$298.00 |
| 9219 | 18" Roll-About Stand w/Fan | 1/6 | 18" | Rotary | Black, 8' S | ETL, OSHA | 24"L x 25"W x 48"H | 27.9 | 4.44 | \$379.00 |
| 9218 | 18" Pivoting Floor Fan | 1/6 | 18" | Rotary | Black, 8' S | ETL, OSHA | 22"L x 9.69"W x 22"H | 21.4 | 3.17 | \$279.00 |
| 9214 | 14" Pivoting Floor Fan | 1/20 | 14" | Rotary | Black, 8' S | ETL, OSHA | 18.69"L x 9"W x 18"H | 13.6 | 1.98 | \$227.00 |
| 9212 | 12" Pivoting Floor Fan | 1/25 | 12" | Rotary | Black, 8' S | ETL, OSHA | 15.5"L x 8.5"W x 16.5"H | 12.1 | 1.43 | \$192.00 |

PERFORMANCE

| MODEL | SPEEDS | VOLTS | PHASES | BEARINGS | CFM | | | RPM | | | AMPS | | | WATTS | | | DB A | | |
|-------|--------|-------|--------|----------------|------|------|------|------|------|------|------|------|------|-------|-----|-----|------|-----|-----|
| | | | | | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW |
| 9230 | 3 | 120 | Single | Enclosed, Ball | 7400 | 6360 | 4980 | 1110 | 975 | 822 | 2.04 | 1.81 | 1.60 | 234 | 206 | 176 | 75 | 71 | 67 |
| 9224 | 3 | 120 | Single | Enclosed, Ball | 5130 | 4490 | 3670 | 1500 | 1250 | 1000 | 2.03 | 1.81 | 1.63 | 229 | 200 | 176 | 72 | 69 | 64 |
| 9220 | 3 | 120 | Single | Enclosed, Ball | 3670 | 3330 | 2940 | 1500 | 1310 | 1050 | 1.60 | 1.30 | 1.10 | 184 | 155 | 130 | 62 | 55 | 48 |
| 9219 | 3 | 120 | Single | Enclosed, Ball | 3190 | 2970 | 2660 | 1500 | 1300 | 1100 | 1.52 | 1.30 | 1.00 | 180 | 150 | 125 | 67 | 58 | 49 |
| 9218 | 3 | 120 | Single | Enclosed, Ball | 3190 | 2970 | 2660 | 1500 | 1300 | 1100 | 1.52 | 1.30 | 1.00 | 180 | 150 | 125 | 67 | 58 | 49 |
| 9214 | 3 | 120 | Single | Enclosed, Ball | 1650 | 1470 | 1180 | 1498 | 1296 | 934 | 0.58 | 0.50 | 0.44 | 63 | 56 | 48 | 58 | 55 | 48 |
| 9212 | 3 | 120 | Single | Open, Sleeve | 1360 | 1170 | 1010 | 1545 | 1205 | 900 | 0.77 | 0.63 | 0.53 | 85 | 76 | 64 | 56 | 49 | 42 |

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



20" and 18" INDUSTRIAL GRADE FANS

Common Usages

Smaller industrial or commercial areas such as garages, fitness centers, offices, schools or Industrial settings to cool multiple workstations



FEATURES

- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel
- Multiple mounting options available
- Pivoting action allows fan to be easily directed to needed area



Pedestal
9420




Pedestal
9418



Secondary support cable included on Wall, Ceiling, and I-Beam Mount models.



Wall Mount
9020




Wall Mount
9518



Ceiling Mount
9320



Ceiling Mount
9718

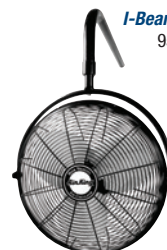

I-Beam Mount
9520



I-Beam Mount
9618



SPECIFICATIONS

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | HEIGHT ADJUSTMENT | PRODUCT DIMENSIONS | WEIGHT (LBS.) | CUBE (FEET) | LIST PRICE |
|-------|-----------------------|-----|------------|-----------|-------------|------------|-------------------|--------------------------|---------------|-------------|------------|
| 9420 | 20" Pedestal Fan | 1/6 | 20" | Rotary | Black, 9' S | ETL, OSHA | 54" - 64" | 26.5"L x 23.25"W x 64"H | 34.3 | 3.76 | \$459.00 |
| 9020 | 20" Wall Mount Fan | 1/6 | 20" | Pull Cord | Black, 9' S | ETL, OSHA | - | 26.5"L x 16.5"W x 29.5"H | 26.0 | 3.47 | \$351.00 |
| 9320 | 20" Ceiling Mount Fan | 1/6 | 20" | Pull Cord | Black, 9' S | ETL, OSHA | - | 26.5"L x 10.5"W x 29.5"H | 23.7 | 3.47 | \$429.00 |
| 9520 | 20" I-Beam Mount Fan | 1/6 | 20" | Pull Cord | Black, 9' S | ETL, OSHA | - | 36"L x 22"W x 42"H | 47.6 | 3.47 | \$576.00 |
| 9418 | 18" Pedestal Fan | 1/6 | 18" | Rotary | Black, 9' S | ETL, OSHA | 52" - 62" | 24"L x 24"W x 62"H | 31.4 | 3.25 | \$435.00 |
| 9518 | 18" Wall Mount Fan | 1/6 | 18" | Pull Cord | Black, 9' S | ETL, OSHA | - | 24"L x 16.5"W x 28"H | 24.8 | 2.80 | \$323.00 |
| 9718 | 18" Ceiling Mount Fan | 1/6 | 18" | Pull Cord | Black, 9' S | ETL, OSHA | - | 24"L x 10.5"W x 28"H | 23.1 | 2.80 | \$407.00 |
| 9618 | 18" I-Beam Mount Fan | 1/6 | 18" | Pull Cord | Black, 9' S | ETL, OSHA | - | 24"L x 37.5"W x 38.5"H | 36.9 | 4.90 | \$560.00 |

PERFORMANCE

| TYPE | SPEEDS | VOLTS | PHASES | BEARINGS | CFM | | | RPM | | | AMPS | | | WATTS | | | DB A | | |
|-------------------------|--------|-------|--------|----------------|------|------|------|------|------|------|------|------|------|-------|-----|-----|------|-----|-----|
| | | | | | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW |
| 20" 1/6 HP ¹ | 3 | 120 | Single | Enclosed, Ball | 3670 | 3330 | 2940 | 1500 | 1310 | 1050 | 1.60 | 1.30 | 1.10 | 184 | 155 | 130 | 62 | 55 | 48 |
| 18" 1/6 HP ² | 3 | 120 | Single | Enclosed, Ball | 3190 | 2970 | 2660 | 1500 | 1300 | 1100 | 1.52 | 1.30 | 1.00 | 180 | 150 | 125 | 67 | 58 | 49 |

¹ Includes models 9420, 9020, 9320, 9520 • ² Includes models 9418, 9518, 9718, 9618
Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



INDUSTRIAL-GRADE MULTI MOUNT FANS


Common Usages

Smaller industrial or commercial areas such as loading docks, fitness centers, restaurants and more
Cool employees at workstation(s)
12" - 14" for individual, 18" for multiple workstations




FEATURES


- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel
- Pivoting action allows fan to be easily directed to needed area
- Can be mounted to walls, ceilings, I-beams and more
- Multiple sizes available

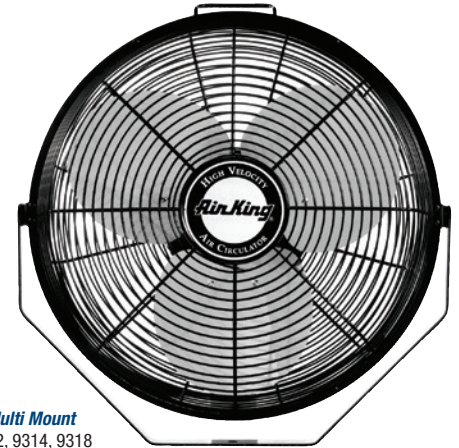

Multi Mount
9312, 9314, 9318



Secondary support
cable included

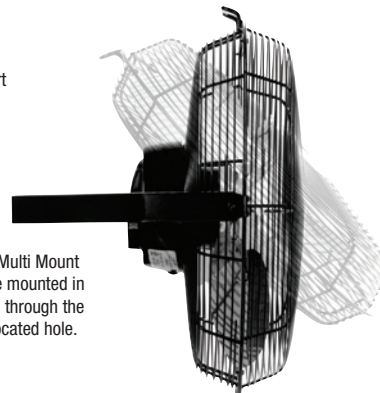

Fan head pivots within Multi Mount Bracket. Bracket can be mounted in virtually any application through the predrilled 3/4" center located hole.



SPECIFICATIONS

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | PRODUCT DIMENSIONS | WEIGHT (LBS.) | CUBE (FEET) | LIST PRICE |
|-------|---------------------|------|------------|-----------|-------------|------------|-------------------------|---------------|-------------|------------|
| 9318 | 18" Multi Mount Fan | 1/6 | 18" | Pull Cord | Black, 9' S | ETL, OSHA | 21.5"L x 16"W x 21"H | 21.4 | 2.85 | \$278.00 |
| 9314 | 14" Multi Mount Fan | 1/20 | 14" | Pull Cord | Black, 9' S | ETL, OSHA | 18"L x 8.88"W x 18.25"H | 14.3 | 1.85 | \$230.00 |
| 9312 | 12" Multi Mount Fan | 1/25 | 12" | Pull Cord | Black, 9' S | ETL, OSHA | 15"L x 12"W x 15"H | 11.5 | 1.39 | \$210.00 |

PERFORMANCE

| MODEL | SPEEDS | VOLTS | PHASES | BEARINGS | CFM | | | RPM | | | AMPS | | | WATTS | | | DB A | | |
|-------|--------|-------|--------|----------------|------|------|------|------|------|------|------|------|------|-------|-----|-----|------|-----|-----|
| | | | | | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW |
| 9318 | 3 | 120 | Single | Enclosed, Ball | 3190 | 2970 | 2660 | 1500 | 1300 | 1100 | 1.52 | 1.30 | 1.00 | 180 | 150 | 125 | 67 | 58 | 49 |
| 9314 | 3 | 120 | Single | Enclosed, Ball | 1650 | 1470 | 1180 | 1498 | 1296 | 934 | 0.58 | 0.50 | 0.44 | 63 | 56 | 48 | 58 | 55 | 48 |
| 9312 | 3 | 120 | Single | Open, Sleeve | 1360 | 1170 | 1010 | 1545 | 1205 | 900 | 0.77 | 0.63 | 0.53 | 85 | 76 | 64 | 56 | 49 | 42 |

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



GOVERNMENT FANS

Common Usages

- Government buildings
- Military bases
- When GSA equipment is required



FEATURES

- Split capacitor motor is permanently lubricated for little to no maintenance
- Guards completely enclose the face, perimeter, and reverse side and permit access to blade assembly without special tools.
- Class A or B installation, NEMA Standard number MG-1
- Conforms to the requirements of Underwriters Laboratories Inc. (UL) Standard No. UL 507
- Grounded, 3 wire North American S or SJT type cordsets
- Multiple fan styles available

Table Fan
3151G




Floor Fan
9214GT



Pedestal Fans

9130G, 9135G, 9125G

Base is suitable for floor use and will not move when fan is operated at high speed

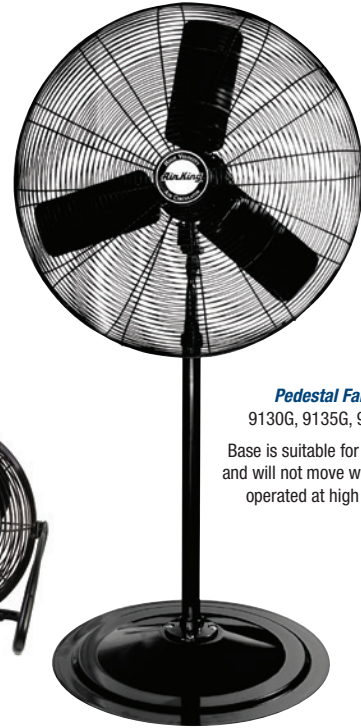

SPECIFICATIONS

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | HEIGHT ADJUSTMENT | PRODUCT DIMENSIONS | WEIGHT (LBS.) | CUBE (FEET) | LIST PRICE |
|--------|--------------------------------------|------|------------|-----------|----------------|------------------|-------------------|------------------------|---------------|-------------|------------|
| 9130G | 30" Pedestal Fan | 1/4 | 30" | Pull Cord | Black, 10' SJT | ETL, OSHA, UL507 | 54.75" - 79" | 33.5"L x 29"W x 79"H | 80.00 | 6.03 | \$701.00 |
| 9135G | 30" Oscillating Pedestal Fan | 1/4 | 30" | Pull Cord | Black, 10' SJT | ETL, OSHA, UL507 | 56" - 81" | 33.5"L x 29"W x 81"H | 82.6 | 6.03 | \$760.00 |
| 9125G | 24" Oscillating Pedestal Fan | 1/4 | 24" | Pull Cord | Black, 10' SJT | ETL, OSHA, UL507 | 53" - 76.5" | 27"L x 78.5"W x "H | 76.1 | 8.26 | \$723.00 |
| 9214GT | 14" Floor Fan | 1/20 | 14" | Rotary | Black, 9' S | ETL, OSHA, UL507 | - | 18.7"L x 9"W x 18"H | 13.6 | 1.98 | \$225.00 |
| 3151G | 16" Oscillating Table/Wall Mount Fan | 1/20 | 16" | Rotary | White, 7' SPT | ETL, OSHA, UL507 | - | 10.8"L x 18"W x 24.4"H | 11.0 | 2.37 | \$140.00 |

PERFORMANCE

| MODEL | SPEEDS | VOLTS | PHASES | BEARINGS | CFM | | | RPM | | | AMPS | | | WATTS | | | DB A | | |
|--------|--------|-------|--------|----------------|------|------|------|------|------|------|------|------|------|-------|-----|-----|------|-----|-----|
| | | | | | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW | HIGH | MED | LOW |
| 9130G | 3 | 120 | Single | Enclosed, Ball | 7400 | 6360 | 4980 | 1110 | 975 | 822 | 2.04 | 1.81 | 1.60 | 234 | 206 | 176 | 75 | 71 | 67 |
| 9135G | 3 | 120 | Single | Enclosed, Ball | 7400 | 6360 | 4980 | 1110 | 975 | 822 | 2.04 | 1.81 | 1.60 | 234 | 206 | 176 | 75 | 71 | 67 |
| 9125G | 3 | 120 | Single | Enclosed, Ball | 5130 | 4490 | 3670 | 1500 | 1250 | 1000 | 2.03 | 1.81 | 1.63 | 229 | 200 | 176 | 72 | 69 | 64 |
| 9214GT | 3 | 120 | Single | Enclosed, Ball | 1650 | 1470 | 1180 | 1498 | 1296 | 934 | 0.58 | 0.50 | 0.44 | 63 | 56 | 48 | 58 | 55 | 48 |
| 3151G | 3 | 120 | Single | Sleeve | 1392 | 1302 | 1142 | 1493 | 1360 | 1190 | 0.81 | 0.56 | 0.48 | 85 | 67 | 57 | 57 | 49 | 44 |


Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



COMMERCIAL PEDESTAL FANS

Common Usages

Commercial settings such as retail stores, gyms, offices, meeting rooms, schools restaurants and more

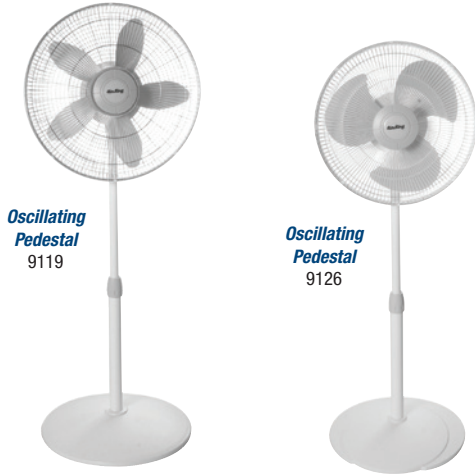

Oscillating Pedestal
9119

Oscillating Pedestal
9126

FEATURES

- 1/20 HP Split capacitor motor is permanently lubricated for little to no maintenance
- Metal front grill with impact resistant plastic rear grill and chemical resistant polypropylene blade
- 90° oscillation broadcasts air over a larger area
- Adjustable height: 37" - 53.75" (9119)
36" - 52" (9126)



PERFORMANCE


| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | CFM | | | AMPS | | | WEIGHT (LBS.) | LIST PRICE |
|-------|--------------------------|------|------------|----------|-------------------|------------|------|------|------|------|------|------|---------------|------------|
| | | | | | | | HIGH | MED | LOW | HIGH | MED | LOW | | |
| 9119 | Oscillating Pedestal Fan | 1/20 | 18" | Rotary | White, 7' SPT-2-R | ETL, OSHA | 1970 | 1520 | 1170 | 1.10 | 0.73 | 0.54 | 13.8 | \$116.00 |
| 9126 | Oscillating Pedestal Fan | 1/20 | 16" | Rotary | White, 7' SPT-2-R | ETL, OSHA | 1710 | 1500 | 1330 | 0.71 | 0.54 | 0.48 | 11.3 | \$115.00 |

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.

COMMERCIAL WALL MOUNT FANS

Common Usages

Commercial settings such as retail stores, fitness centers, salons, offices, meeting rooms, restaurants, schools and more

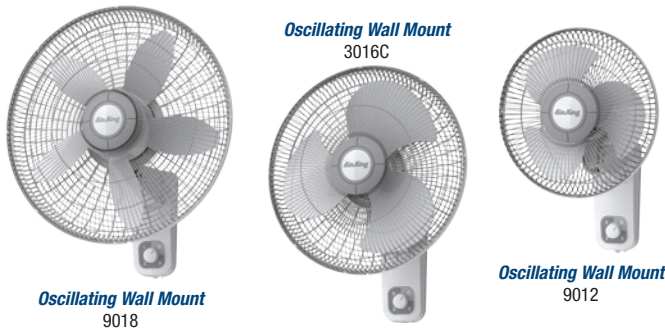

Oscillating Wall Mount
9018

Oscillating Wall Mount
3016C

Oscillating Wall Mount
9012

FEATURES

- Split capacitor motor is permanently lubricated for little to no maintenance
- Metal front grill with impact resistant plastic rear grill and chemical resistant polypropylene blade
- 90° oscillation broadcasts air over a larger area
- Wall mount bracket included with the unit



PERFORMANCE

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | CFM | | | AMPS | | | WEIGHT (LBS.) | LIST PRICE |
|-------|----------------------------|------|------------|----------|-------------------|------------|------|------|------|------|------|------|---------------|------------|
| | | | | | | | HIGH | MED | LOW | HIGH | MED | LOW | | |
| 9018 | Oscillating Wall Mount Fan | 1/20 | 18" | Rotary | White, 7' SPT-2-R | ETL, OSHA | 1970 | 1520 | 1170 | 1.10 | 0.73 | 0.54 | 10.9 | \$130.00 |
| 3016C | Oscillating Wall Mount Fan | 1/20 | 16" | Rotary | White, 7' SPT-2-R | ETL, OSHA | 1710 | 1500 | 1330 | 0.71 | 0.54 | 0.48 | 11.3 | \$139.00 |
| 9012 | Oscillating Wall Mount Fan | 1/50 | 12" | Rotary | White, 7' SPT-2-R | ETL, OSHA | 930 | 780 | 620 | 0.40 | 0.30 | 0.27 | 8.3 | \$107.00 |

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



COMMERCIAL-TABLE FANS

Common Usages

Commercial settings such as reception desks, offices, retail stores, restaurants



Oscillating Table Fan
3016C



Oscillating Table Fan
9102

FEATURES

- Split capacitor motor is permanently lubricated for little to no maintenance
- Metal front grill with impact resistant plastic rear grill and chemical resistant polypropylene blade
- 90° oscillation broadcasts air over a larger area



PERFORMANCE

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | CFM | | | AMPS | | | WEIGHT (LBS.) | LIST PRICE |
|-------|-----------------------|------|------------|----------|-------------------|------------|------|------|------|------|------|------|---------------|------------|
| | | | | | | | HIGH | MED | LOW | HIGH | MED | LOW | | |
| 9106 | Oscillating Table Fan | 1/20 | 16" | Rotary | White, 7' SPT-2-R | ETL, OSHA | 1710 | 1500 | 1330 | 0.71 | 0.54 | 0.48 | 9.8 | \$105.00 |
| 9102 | Oscillating Table Fan | 1/50 | 12" | Rotary | White, 7' SPT-2-R | ETL, OSHA | 930 | 780 | 620 | 0.40 | 0.30 | 0.27 | 7.0 | \$92.00 |

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.

COMMERCIAL-PIVOTING FANS

Common Usages

Commercial settings such as retail stores, fitness centers, salons, offices, restaurants, music studios and more



Pivot Fan
9500



Pivot Fan
9530



Pivot Fan
9525

FEATURES

- Permanently lubricated for little to no maintenance
- Impact resistant plastic with chemical resistant polypropylene blade
- 120 degree pivoting fan head directs air to where it is needed most
- Wall mount option built into the base (models 9500 and 9530 only)



PERFORMANCE

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | CFM | | | AMPS | | | WEIGHT (LBS.) | LIST PRICE |
|-------|-------------------------------|-------|------------|----------|-------------------|------------|------|------|------|------|------|------|---------------|------------|
| | | | | | | | HIGH | MED | LOW | HIGH | MED | LOW | | |
| 9500 | 20" Deluxe Pivot Fan | 1/22 | 20" | Rotary | Black, 6' SPT-2-R | ETL, OSHA | 2390 | 1975 | 1490 | 1.00 | 0.73 | 0.54 | 12.4 | \$105.00 |
| 9530 | 9" High Performance Pivot Fan | 1/50 | 9" | Rotary | Black, 6' SPT-2-R | ETL, OSHA | 700 | 610 | 520 | 0.50 | 0.43 | 0.37 | 4.4 | \$80.00 |
| 9525 | 9" Pivot Fan | 1/100 | 9" | Rotary | White, 7' SPT-2-R | ETL, OSHA | 430 | - | 340 | 0.57 | - | 0.39 | 4.5 | \$66.00 |


Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



COMMERCIAL BOX FAN

Common Usages

Commercial settings such as retail stores, gyms, restaurants, schools as well as dorm rooms

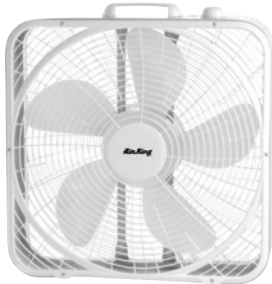

Box Fan
9723



Roll-About Stand
9701

FEATURES

- 1/25 HP Split capacitor motor is permanently lubricated for little to no maintenance
- Steel body with impact resistant plastic grills and chemical resistant polypropylene blade

ROLL-ABOUT STAND

- Gray powder coated steel with 4" diameter wheels for mobility
- Fan can be mounted at either 26" or 28" off the floor (fan sold separately)

Model 9701 Roll-About fits model 9723 Box Fan. Fan is NOT INCLUDED with stand.



PERFORMANCE

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | CFM | | | AMPS | | | WEIGHT (LBS.) | LIST PRICE |
|-------|-------------------------------------|------|------------|----------|-------------------|------------|------|------|------|------|------|------|---------------|------------|
| | | | | | | | HIGH | MED | LOW | HIGH | MED | LOW | | |
| 9723 | Box Fan | 1/25 | 20" | Rotary | White, 8' SPT-2-R | ETL, OSHA | 2220 | 1920 | 1530 | 1.82 | 1.30 | 1.00 | 12.8 | \$90.00 |
| 9701 | Roll-About Stand (Fan NOT included) | - | - | - | - | - | - | - | - | - | - | - | 6.2 | \$87.00 |

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.

COMMERCIAL OFFICE FANS

Common Usages

Commercial settings such as desks, work stations and other tight spaces that need personal cooling



Personal Fan
9146



Clip-On Fan
9145

FEATURES

- 1 phase motor is permanently lubricated for little to no maintenance
- Zinc plated steel front grill with impact resistant plastic rear grill and chemical resistant polypropylene blade
- Tilting fan head
- Durable, spring-loaded clip holds tightly without marking surfaces (9145)
- Convenient storage compartment (9146)



PERFORMANCE

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | CFM | | | AMPS | | | WEIGHT (LBS.) | LIST PRICE |
|-------|--------------|-------|------------|----------|-------------------|------------|------|-----|-----|------|-----|------|---------------|------------|
| | | | | | | | HIGH | MED | LOW | HIGH | MED | LOW | | |
| 9145 | Clip-On Fan | 1/300 | 6" | Rotary | White, 7' SPT-2-R | ETL, OSHA | 190 | - | 90 | 0.19 | - | 0.15 | 2.1 | \$55.00 |
| 9146 | Personal Fan | 1/300 | 6" | Rotary | White, 7' SPT-2-R | ETL, OSHA | 190 | - | 90 | 0.19 | - | 0.15 | 2.1 | \$40.00 |

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.



COMMERCIAL PIVOTING BLOWERS

Common Usages

Areas needing ultra portable air circulation such as:
Construction sites, restaurants, workshops and more
Great for helping to quickly dry floors in basements,
businesses or public areas



FEATURES

- Split capacitor motor is permanently lubricated for little to no maintenance
- Molded ABS plastic won't rust
- Pivoting action allows fan to be easily directed to needed area
- Ultra portable
- Includes two 120V outlets with circuit breaker and reset button



*Pivoting Utility
Blower*
9550

PERFORMANCE

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | CFM | | | AMPS | | | WEIGHT (LBS.) | LIST PRICE |
|-------|-------------------------|------|------------|----------|--------------|------------|------|-----|-----|------|------|------|---------------|------------|
| | | | | | | | HIGH | MED | LOW | HIGH | MED | LOW | | |
| 9550 | Pivoting Utility Blower | 1/16 | 6" x 6" | Rotary | Black, 7' SO | ETL, OSHA | 310 | 269 | 190 | 0.80 | 0.62 | 0.50 | 10.1 | \$217.00 |

Specifications are subject to change.

WINDOW FANS

Common Usages

Exhaust hot air out of office areas or
bring cooler air in.

Use in residential settings, small businesses or
businesses set up in residential buildings



FEATURES

- Split capacitor motor is permanently lubricated for little to no maintenance
- Reversible motor allows fan to exhaust air out or bring air in
- Can be mounted in front of window, allowing window to close behind the fan during inclement weather
- Impact resistant plastic housing, metal front grill and blade (model 9166)
High impact styrene housing, ABS plastic blade, and metal front grill (model 9155)
- Window Size Requirements:
9166: 27" - 38" x 26.25"H
9155: 26.5" - 34.5" x 22"H



*Whole House
Window Fan*
9166



Window Fan
9155

PERFORMANCE

| MODEL | DESCRIPTION | HP | BLADE SIZE | CONTROLS | POWER CORD | COMPLIANCE | CFM | | | AMPS | | | WEIGHT (LBS.) | LIST PRICE |
|-------|----------------------------|-----|------------|----------|------------------|------------|------|------|------|------|------|------|---------------|------------|
| | | | | | | | HIGH | MED | LOW | HIGH | MED | LOW | | |
| 9166 | 20" Whole House Window Fan | 1/6 | 20" | Rotary | Black, 7' SPT-2R | ETL, OSHA | 3560 | 3120 | 2510 | 1.40 | 1.30 | 1.00 | 36.0 | \$495.00 |
| 9155 | 16" Window Fan | 1/6 | 16" | Rotary | White, 7' SPT | ETL, OSHA | 2470 | 1700 | 1360 | 0.83 | 0.55 | 0.45 | 15.0 | \$306.00 |

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.






| Model | Description | UPC | Page |
|-------------------------------------|---------------------------------------|-----------------|------|
| Industrial Grade Drum Fans | | | |
| 9236D | 1/3 HP 36" Direct Drive Drum Fan | 0-46013-30301-1 | 3 |
| 1/3 HP Industrial Grade Fans | | | |
| 9170 | 30" Pedestal Fan | 0-46013-38990-9 | 4 |
| 9175 | 30" Oscillating Pedestal Fan | 0-46013-38960-2 | 4 |
| 9171 | 24" Pedestal Fan | 0-46013-38980-0 | 4 |
| 9174 | 24" Oscillating Pedestal Fan | 0-46013-38970-1 | 4 |
| 9070 | 30" Wall Mount Fan | 0-46013-38940-4 | 4 |
| 9075 | 30" Oscillating Wall Mount Fan | 0-46013-38920-6 | 4 |
| 9071 | 24" Wall Mount Fan | 0-46013-38950-3 | 4 |
| 9074 | 24" Oscillating Wall Mount Fan | 0-46013-38930-5 | 4 |
| 9370 | 30" Ceiling Mount Fan | 0-46013-38900-8 | 4 |
| 9375 | 30" Oscillating Ceiling Mount Fan | 0-46013-38880-3 | 4 |
| 9374 | 24" Oscillating Ceiling Mount Fan | 0-46013-38890-2 | 4 |
| 9670 | 30" I-Beam Mount Fan | 0-46013-38860-5 | 4 |
| 1/4 HP Industrial Grade Fans | | | |
| 9130 | 30" Pedestal Fan | 0-46013-11780-9 | 5 |
| 9135 | 30" Oscillating Pedestal Fan | 0-46013-39560-3 | 5 |
| 9124 | 24" Pedestal Fan | 0-46013-39500-9 | 5 |
| 9125 | 24" Oscillating Pedestal Fan | 0-46013-39510-8 | 5 |
| 9030 | 30" Wall Mount Fan | 0-46013-39350-0 | 5 |
| 9035 | 30" Oscillating Wall Mount Fan | 0-46013-39550-4 | 5 |
| 9024 | 24" Wall Mount Fan | 0-46013-39480-4 | 5 |
| 9025 | 24" Oscillating Wall Mount Fan | 0-46013-39490-3 | 5 |
| 9330 | 30" Ceiling Mount Fan | 0-46013-38800-1 | 5 |
| 9335 | 30" Oscillating Ceiling Mount Fan | 0-46013-38780-6 | 5 |
| 9724 | 24" Ceiling Mount Fan | 0-46013-38810-0 | 5 |
| 9430 | 30" I-Beam Mount Fan | 0-46013-39670-9 | 5 |
| 9635 | 30" Oscillating I-Beam Mount Fan | 0-46013-38760-8 | 5 |
| 9424 | 24" I-Beam Mount Fan | 0-46013-39690-7 | 5 |
| Industrial Grade Quiet Fans | | | |
| 99222 | 24" Quiet, Floor Fan | 0-46013-30525-2 | 6 |
| 99532 | 30" Quiet, Oscillating Pedestal Fan | 0-46013-39565-8 | 6 |
| 99533 | 24" Quiet, Oscillating Pedestal Fan | 0-46013-39515-3 | 6 |
| 99538 | 30" Quiet, Oscillating Wall Mount Fan | 0-46013-39555-9 | 6 |
| 99539 | 24" Quiet, Oscillating Wall Mount Fan | 0-46013-39495-8 | 6 |
| Industrial Grade Floor Fans | | | |
| 9230 | 1/4 HP 30" Floor Fan | 0-46013-39570-2 | 7 |
| 9224 | 1/4 HP 24" Floor Fan | 0-46013-39520-7 | 7 |
| 9220 | 1/6 HP 20" Floor Fan | 0-46013-39300-5 | 7 |
| 9219 | 1/6 HP 18" Roll-About Stand Fan | 0-46013-39190-2 | 7 |
| 9218 | 1/6 HP 18" Floor Fan | 0-46013-39170-4 | 7 |
| 9214 | 1/20 HP 14" Floor Fan | 0-46013-39710-2 | 7 |
| 9212 | 1/25 HP 12" Floor Fan | 0-46013-39160-5 | 7 |

Specifications are subject to change.

| Model | Description | UPC | Page |
|--|--------------------------------------|-----------------|------|
| 20" and 18" Industrial Grade Fans | | | |
| 9420 | 1/6 HP 20" Pedestal Fan | 0-46013-39290-9 | 8 |
| 9020 | 1/6 HP 20" Wall Mount Fan | 0-46013-39340-1 | 8 |
| 9320 | 1/6 HP 20" Ceiling Mount Fan | 0-46013-38820-9 | 8 |
| 9520 | 1/6 HP 20" I-Beam Mount Fan | 0-46013-39650-1 | 8 |
| 9418 | 1/6 HP 18" Pedestal Fan | 0-46013-39680-8 | 8 |
| 9518 | 1/6 HP 18" Wall Mount Fan | 0-46013-39660-0 | 8 |
| 9718 | 1/6 HP 18" Ceiling Mount Fan | 0-46013-38830-8 | 8 |
| 9618 | 1/6 HP 18" I-Beam Mount Fan | 0-46013-39700-3 | 8 |
| Industrial Grade Multi Mount Fans | | | |
| 9318 | 1/6 HP 18" Multi Mount Fan | 0-46013-39470-5 | 9 |
| 9314 | 1/20 HP 14" Multi Mount Fan | 0-46013-39720-1 | 9 |
| 9312 | 1/25 HP 12" Multi Mount Fan | 0-46013-39460-6 | 9 |
| Government Fans | | | |
| 9130G | 30" Pedestal Fan | 0-46013-11750-2 | 10 |
| 9135G | 30" Oscillating Pedestal Fan | 0-46013-38200-9 | 10 |
| 9125G | 24" Oscillating Pedestal Fan | 0-46013-38190-3 | 10 |
| 9214GT | 14" Floor Fan | 0-46013-39710-2 | 10 |
| 3151G | 16" Oscillating Table/Wall Mount Fan | 0-46013-32210-4 | 10 |
| Commercial Pedestal Fans | | | |
| 9119 | 18" Oscillating Pedestal Fan | 0-46013-39080-6 | 11 |
| 9126 | 16" Oscillating Pedestal Fan | 0-46013-39070-7 | 11 |
| Commercial Wall Mount Fans | | | |
| 9018 | 18" Oscillating Wall Mount Fan | 0-46013-39090-5 | 11 |
| 3016C | 16" Oscillating Wall Mount Fan | 0-46013-19790-0 | 11 |
| 9012 | 12" Oscillating Wall Mount Fan | 0-46013-33260-8 | 11 |
| Commercial Table Fans | | | |
| 9106 | 16" Oscillating Table Fan | 0-46013-38120-0 | 12 |
| 9102 | 12" Oscillating Table Fan | 0-46013-38110-1 | 12 |
| Commercial Pivot Fans | | | |
| 9500 | 20" Deluxe Pivot Fan | 0-46013-39120-9 | 12 |
| 9530 | 9" High Performance Pivot Fan | 0-46013-39320-3 | 12 |
| 9525 | 9" Pivot Fan | 0-46013-39140-7 | 12 |
| Commercial Box Fan | | | |
| 9723 | 20" Box Fan | 0-46013-39110-0 | 13 |
| 9701 | Roll-About Stand | 0-46013-39100-1 | 13 |
| Commercial Office Fans | | | |
| 9145 | 6" Clip-On Fan | 0-46013-38030-2 | 13 |
| 9146 | 6" Personal Fan | 0-46013-38040-1 | 13 |
| Commercial Pivoting Blowers | | | |
| 9550 | Pivoting Utility Blower | 0-46013-39840-6 | 14 |
| Window Fans | | | |
| 9166 | 20" Whole House Window Fan | 0-46013-38020-3 | 14 |
| 9155 | 16" Window Fan | 0-46013-38010-4 | 14 |



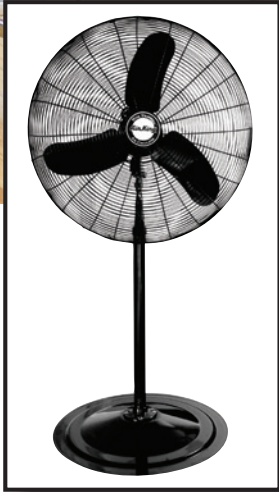

For additional information regarding our industrial air circulators or any of our other full lines of exhaust fans and range hoods, please contact the dealer nearest you or:

United States:
West Chester, PA
Phone: 877-304-3785
Fax: 610-696-8048
E-mail: sales@airkinglimited.com

