



# CADET

INVITING WARMTH




## APEX72

Gain living space and bring comfort to your entire room

- Mounts above 72" away from children and pets
- Two outlet grill options; hexagonal and louvered

cover: 12" w x 8-1/2" h x 1" d  
rough-in: 10-1/4" w x 8" h x 4" d

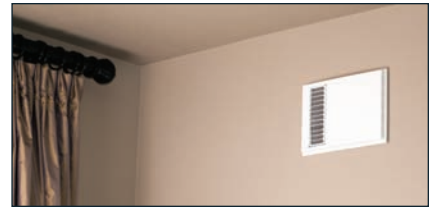

Heater assemblies require a wall can, decorative cover and thermostat

part	model	description	watts	volts	amps	btus	wt/lbs
65305	HW052	heater assembly without thermostat	500	240	2.1	1710	4.7
65304	HW082	"	800	240	3.3	2730	4.7
65303	HW102	"	1000	240	4.2	3415	4.7
65302	HW132	"	1300	240	5.4	4440	4.7
65313	HW038	"	375	208	1.8	1280	4.7
65312	HW058	"	525	208	2.5	1795	4.7
65311	HW078	"	750	208	3.6	2560	4.7
65310	HW108	"	1000	208	4.8	3415	4.7
65309	HW128	"	1200	208	5.8	4095	4.7
65308	HW168	"	1600	208	7.7	5460	4.7
65301	HW162	"	1600/1200	240/208	6.7/5.7	5460/4095	4.7
67121	SC						2.8
67120	SC10	wall can for model HW, single pack or 10-pack					28
67129	ACL						.7
67131	ACL5	decorative cover for model HW with louver outlet grill, single pack or 5-pack, white					3.6
67130	ACH						.7
67132	ACH5	decorative cover for model HW with hexagonal outlet grill, single pack or 5-pack, white					3.6

## Energy Plus

More comfort, less energy

- Use up to 30% less energy with automatically adjusting wattage and variable speed fan
- Built-in digital thermostat

grill: 9" w x 12" h x 5/8" d  
rough-in: 8" w x 10-1/4" h x 4" d

Heater assemblies require a wall can and grill kit

Accessories on page 2

Temperature setpoint range 40°F to 90°F



part	model	description	watts	volts	amps	btus	wt/lbs
65201	CEC163TW	complete unit with controller, wall can and grill	1600/1500/1000	240/208/120	6.7/7.2/8.3	5460/5120/3415	8.1
65203	CE083T	heater assembly multi-volt with controller	800/750/500	240/208/120	3.3/3.6/4.2	2730/2560/1710	5
65204	CE163T	"	1600/1500/1000	240/208/120	6.7/7.2/8.3	5460/5120/3415	5.2
65250	CEGW	grill kit for model CE, white					1.5

## REGISTER

Powerful performance for any room

- Enjoy complete warmth, thanks to a powerful air fan
- Vent-style grill blends in with any décor

grill: 14" w x 7-3/8" h x 1" d  
rough-in: 12-3/4" w x 6" h x 4" d

Heater assemblies require wall can, grill kit and thermostat



part	model	description	watts	volts	amps	btus	wt/lbs
63315	RMC151W	complete unit with wall can and grill	500/1000/1500	120	4.2/8.3/12.5	1710/3415/5120	9
63316	RMC208W	"	2000	208	9.6	6825	9
63314	RMC162W	"	700/900/1600 525/675/1200	240/208	2.9/3.8/6.7 2.5/3.3/5.8	2390/3075/5460 1795/2305/4095	9
63313	RMC202W	"	2000/1500	240/208	8.3/7.2	6825/5120	9
00308	RM151	heater assembly without thermostat	500/1000/1500	120	4.2/8.3/12.5	1710/3415/5120	4.5
00310	RM108	"	1000	208	4.8	3415	4.5
00323	RM158	"	1500	208	7.2	5120	4.5
00313	RM168	"	700/900/1600	208	3.4/4.3/7.7	2390/3175/5460	4.7
00309	RM208	"	2000	208	9.6	6825	4.5
00311	RM102	"	1000/750	240/208	4.2/3.6	3415/2560	4.5
00307	RM162	"	700/900/1600 525/675/1200	240/208	2.9/3.8/6.7 2.5/3.3/5.8	2390/3075/5460 1795/2305/4095	4.5
00306	RM202	"	2000/1500	240/208	8.3/7.2	6825/5120	4.5
00322	RM222	"	2250/1687	240/208	9.4/8.1	7680/5760	4.5
00275	RMGW						1.5
00276	RMGA	grill kit for model RM, single pack, white or almond					1.5
63113	RMGW5						7.5
63114	RMGA5	grill kit for model RM, 5-pack, white or almond					7.5
63115	RMC						3.3
63116	RMC5	wall can for model RM, single pack or 5-pack					14.3
63123	RMT2W						.5
63124	RMT2A	built-in thermostat kit for model RM, double pole, 40°F to 85°F, white or almond		240/208/120	25		.5
63118	RMS4W	surface mount adapter for model RM, 4" deep, white					6

## COM-PAK MAX

### Versatile, multi-watt warmth

- Enjoy years of reliable use with our sturdiest sealed element
- Fit any application with horizontal or vertical options

grill: 12" w x 9" h x 1" d or 9" w x 12" h x 1" d  
 rough-in: 10-1/4" w x 8" h x 4" d or 8" w x 10-1/4" h x 4" d

Accessories below

Heater assemblies require a wall can, grill kit, and may require a thermostat



part	model	description	watts	volts	amps	btus	wt/lbs
65030	CM168	heater assembly without thermostat	700/900/1600	208	3.4/4.3/9.7	2390/3075/5460	5
65008	CM208	heater assembly without thermostat	500/800/1200/1500/2000	208	2.4/3.9/5.8/7.2/9.6	1710/2730/4095/5120/6825	4.8
65009	CM208T	heater assembly with thermostat					5
65001	CM162	"	700/900/1600	240/208	2.9/3.8/6.7	2390/3075/5460	4.3
65002	CM162T		525/675/1200				4.5
65003	CM202	"	500/800/1200/1500/2000	240/208	2.1/3.3/5.0/6.3/8.3	1710/2730/4095/5120/6825	4.3
65004	CM202T		375/600/900/1125/1500				4.5

## COM-PAK BATH

### Warmth for every morning

- Built-in thermostat and 60-minute timer
- Coated heating element prevents rust in moist bathroom environments and provides quick and efficient warmth

grill: 10" w x 12-5/8" h x 1/2" d  
 rough-in: 8" w x 10-1/4" h x 4" d

Accessories below

Heater assemblies require a wall can and grill kit



part	model	description	watts	volts	amps	btus	wt/lbs
65101	CBC103TW	complete unit with thermostat and timer, wall can and grill, multi-volt	1000/1000	240/120	4.2/8.3	3415	8
65105	CBC132TW	complete unit with thermostat and timer, wall can, and grill, multi-watt	500/800/1300 375/600/975	240/208	2.1/3.3/5.4 1.8/2.9/4.5	1710/2730/4440 1280/2050/3300	8
65103	CB103T	heater assembly with thermostat and timer, multi-volt	1000/1000	240/120	4.2/8.3	3415	4.7
65104	CB132T	heater assembly with thermostat and timer, multi-watt	500/800/1300 375/600/975	240/208	2.1/3.3/5.4 1.8/2.9/4.7	1710/2730/4440 1280/2050/3330	4.7
65110	CBGW	grill kit for model CB, single or 5-pack, white					1.5
65150	CBGW5						7

## WALL HEATER ACCESSORIES (MODELS CS, CM, CE, CB, CST)

part	model	description	volts	amps	wt/lbs
67061	CC	wall can for models CS, CM, CE or CB, single or 10-pack			2.8
67060	CC10				22.5
67079	CGW	vertical grill kit for models CS, CM, single or 10-pack, white			1.5
67081	CGW10				12.3
67075	CGA	vertical grill kit for models CS, CM, single or 10-pack, almond			1.5
67080	CGA10				12.3
65015	CMGA	horizontal grill kit for models CS, CM, single or 5-pack, almond			2.0
65016	CMGA5				7.5
65005	CMGW	horizontal grill kit for models CS, CM, single or 5-pack, white			2.0
65006	CMGW5				7.5
67063	CTT1W	built-in thermostat kit for models CS, CST, CM, single pole, 40°F to 85°F, white or almond	240/208/120	25	.2
67065	CTT1A				.2
67064	CTT2W	built-in thermostat kit for models CS, CST, CM, double pole, 40°F to 85°F, white or almond	240/208/120	25	.2
67066	CTT2A				.2
67067	CTTP	built-in thermostat kit, tamper proof for models CS, CST, CM, single pole, 40°F to 85°F	240/208/120	25	.2
06395	CS4MW	surface mount adapter for models CS, CM, or CE, 9-1/2" w x 12-5/8" h x 4-3/8" d, white or almond			3.5
06390	CS4MA				
67105	CAMW	adapter plate for models CS, CM, CE, or CB, 18-1/2" w x 22" h, white or almond			3.5
67100	CAMA				
67115	SAMW	adapter plate for models CS, CM, CE, or CB, 12" w x 21-1/4" h, white or almond			2
67110	SAMA				
67088	FWAP	adapter kit repurposes outdated model FW wall can and grill, use with model CS heater assembly			1

# COM-PAK


Perfectly simple warmth for any room

- Warm up in a hurry with a fast-heating coil element
- Ceiling installation with models 1,500 watts or less

grill: 9" w x 12" h x 1" d  
rough-in: 8" w x 10-1/4" h x 4" d

Accessories on page 2

Heater assemblies require a wall can, grill kit, and may require a thermostat

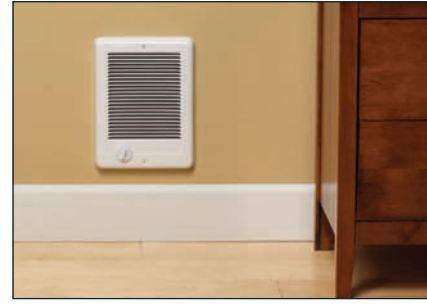

part	model	description	watts	volts	amps	btus	wt/lbs
67508	CSC101TW	complete unit with thermostat, wall can and grill	1000	120	8.3	3415	7
67509	CSC151TW	"	1500	120	12.5	5120	7
67505	CSC102TW	"	1000/750	240/208	4.2/3.6	3415/2560	7
67506	CSC152TW	"	1500/1125	240/208	6.3/5.4	5120/3840	7
67507	CSC202TW	"	2000/1500	240/208	8.3/7.2	6825/5120	7
67550	CS051	heater assembly without thermostat	500	120	4.2	1710	3.5
67560	CS051T	heater assembly with thermostat					4
67515	CS101	"	1000	120	8.3	3415	3.5
67523	CS101T	"					4
67516	CS151	"	1500	120	12.5	5120	3.5
67524	CS151T	"					4
67563	CS058	"	563	208	2.7	1925	3.5
67573	CS058T	"					4
67564	CS078	"	750	208	3.6	2560	3.5
67589	CS078T	"					4
67557	CS108	"	1000	208	4.8	3415	3.5
67586	CS108T	"					4
67569	CS118	"	1125	208	5.4	3840	3.5
67598	CS118T	"					4
67571	CS158	"	1500	208	7.2	5120	3.5
67599	CS158T	"					4
67517	CS208	"	2000	208	9.6	6825	3.5
67525	CS208T	"					4
67584	CS052	"	500/375	240/208	2.1/1.8	1710/1280	3.5
67585	CS052T	"					4
67510	CS072	"	750/563	240/208	3.1/2.7	2560/1925	3.5
67518	CS072T	"					4
67511	CS102	"	1000/750	240/208	4.2/3.6	3415/2560	3.5
67519	CS102T	"					4
67512	CS122	"	1250/937	240/208	5.2/4.5	4265/3200	3.5
67520	CS122T	"					4
67513	CS152	"	1500/1125	240/208	6.3/5.4	5120/3840	3.5
67521	CS152T	"					4
67514	CS202	"	2000/1500	240/208	8.3/7.2	6825/5120	3.5
67522	CS202T	"					4

# COM-PAK TWIN

Ideal warmth for larger areas

- Ideal for large rooms, open areas and entryways
- Warms up quickly with fast-heating coil elements and efficient fans

grill: 16-1/4" w x 12" h x 1" d  
rough-in: 14-5/8" w x 10" h x 4" d

Accessories on page 2

Heater assemblies require a wall can, grill kit, and may require a thermostat



part	model	description	watts	volts	amps	btus	wt/lbs
67526	CSTC302TW	complete unit with thermostat, wall can and grill	3000/2250	240/208	12.5/10.8	10240/7680	12
67527	CSTC402TW	"	4000/3000	240/208	16.7/14.4	13650/10240	12
67574	CST308	heater assembly without thermostat	3000	208	14.4	10240	6.5
67534	CST308T	heater assembly with thermostat					7
67530	CST408	"	4000	208	19.2	13650	6.5
67533	CST408T	"					7
67528	CST302	"	3000/2250	240/208	12.5/10.8	10240/7680	6.5
67531	CST302T	"					7
67529	CST402	"	4000/3000	240/208	16.7/14.4	13650/10240	6.5
67532	CST402T	"					7
68005	CTC	wall can for model CST, single pack					3.5
67089	CTGW	grill kit for model CST, single pack, white or almond					2.5
67090	CTGA						
69100	CTS4W	surface mount adapter for model CST, 16-1/2" w x 12-1/4" h x 4-3/8" d, white or almond					6
69104	CTS4A						
68075	CTAMW	adapter plate for model CST, 18-1/2" w x 22" h, white or almond					3
68070	CTAMA						



# PERFECTOE

## Space saving design ideal for under cabinets

- Neatly fits under cabinets in the toe-kick area
- Perfect for kitchens, bathrooms and stairwells

grill: 18" w x 3-1/2" h x 1/2" d  
rough-in: 14-1/2" w x 3-1/2" h x 8-1/4" d

\*add suffix B or W to model to designate color

Complete units require a thermostat



black part	white part	*model	description	watts	volts	amps	btus	wt/lbs
10032	10034	UC101	complete unit with wall can and grill, black or white	1000	120	8.3	3415	8
10027	10030	UC072	"	750/563	240/208	3.1/2.7	2560/1920	8
10036	10039	UC102	"	1000/750	240/208	4.2/3.6	3415/2560	8
66075	66076	UCT1	built-in thermostat kit for model UC, single pole, 40°F to 85°F, black or white		240/208/120	25		.5
66077	66078	UCT2	built-in thermostat kit for model UC, double pole, 40°F to 85°F, black or white		240/208/120	25		.5

# SL


## Efficient and uniform warmth

- Warm up in peace and quiet
- Dual exhausts help distribute heat evenly throughout the room

grill: 16-3/4" w x 12-7/8" h x 1" d  
rough-in: 14-5/8" w x 10" h x 4" d

Thermostat temperature range 40°F to 85°F

Order wall can separately

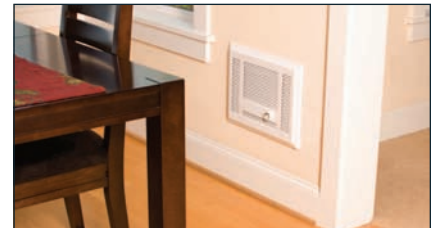

part	model	description	watts	volts	amps	btus	wt/lbs
79233	SL101TW	heater assembly with thermostat and grill	1000	120	8.3	3415	9
79219	SL151TW	"	1500	120	12.5	5120	9
79220	SL152TW	"	1500/1125	240/208	6.3/5.4	5120/3840	9
79221	SL192TW	"	1900/1425	240/208	7.9/6.9	6485/4865	9
79230	SL252TW	"	2500/1875	240/208	10.4/9.0	8530/6400	9
79222	SL302TW	"	3000/2250	240/208	12.5/10.8	10240/7680	9
79239	SLC	wall can for model SL, single pack					4.5
79240	SLC-S	wall can for model SL, surface mount, 17" w x 13" h x 4" d, white					6.4

# NLW

## Quiet warmth for large rooms and entryways

- Unique fan design reduces air turbulence and noise
- Circulate air during the warmer months with the fan-only mode

grill: 16-3/4" w x 21" h x 1" d  
rough-in: 15" w x 19-1/8" h x 4" d

Thermostat temperature range 40°F to 85°F

Order wall can separately



part	model	description	watts	volts	amps	btus	wt/lbs
79208	NLW208TW	heater assembly with thermostat and grill	2000	208	9.6	6825	16
79209	NLW308TW	"	3000	208	14.4	10240	16
79210	NLW408TW	"	4000	208	19.2	13650	16
79200	NLW202TW	"	2000/1500	240/208	8.3/7.2	6825/5120	16
79201	NLW302TW	"	3000/2250	240/208	12.5/10.8	10240/7680	16
79202	NLW402TW	"	4000/3000	240/208	16.7/14.4	13650/10240	16
79203	NLW452TW	"	4500/3375	240/208	18.8/16.2	15355/11515	16
79214	NLWC	wall can for model NLW, single pack					6.3
79215	NLWC-S	wall can for model NLW, surface mount, 16-5/8" w x 20-5/8" h x 4" d, white					9.2


# RBF

## Style and warmth for your bathroom

- Stylish mesh screen distributes warmth evenly
- Operation is as easy as flipping a switch
- Stainless steel grill

grill: 12" w x 19" h x 1/4" d  
rough-in: 10-1/4" w x 17" h x 4" d

Order wall can separately

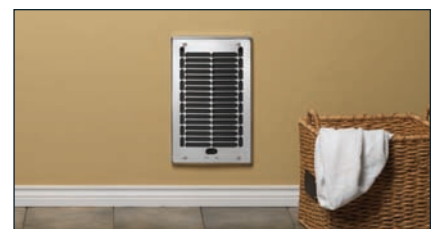

part	model	description	watts	volts	amps	btus	wt/lbs
79241	RBF101	heater assembly with on/off switch and grill	1000	120	8.3	3415	8
79243	RBFC	wall can for model RBF, single pack					4.5



# THE HOT ONE

## Premium utility heater

- Six-foot cord and heavy-duty bracket
- High/Low switch provides wattage choices
- 240 volt receptacle required

dimensions: 15-3/4" w x 17-1/2" h x 8-1/4" d



part	model	description	receptacle	watts hi/low	volts	amps hi/low	btus hi/low	wt/lbs
10288	RCP402S	portable garage heater, red	NEMA 6-20R	4000/2667	240	16.7/11.1	13650/9100	29.4
10289	RCP502S	"	NEMA 6-30R	5000/3333	240	20.8/13.9	17060/11375	29.4

# CEH

## Industrial strength heat

- Conveniently mounts with downward or horizontally directed air flow
- 1- or 3- phase wiring options available to fit your application

dimensions: 14" w x 16" h x 8-1/4" d

Order mounting accessories and thermostat separately



CEH



CEKM1



CEKWM



CEKV1

part	model	description	watts	volts	amps	btus	wt/lbs
09265	CEH005P	industrial unit heater 1/3 phase, field convertible	5000/3750	240/208	20.8/18	17060/12795	24
09660	CEKM1	ceiling hat mounting bracket for model CEH, black					1.5
09670	CEKWM	wall hanger mounting arm for model CEH, black, also requires CEKM1					5
09282	CEKV1	air vane louver kit for model CEH					1
09610	CEKTB1	built-in thermostat kit for model CEH, single pole, 40°F to 85°F			22		1
09615	CEKTB2	built-in thermostat kit for model CEH, two-stage, 40°F to 85°F, required for 3-phase hookup			22		1

# ELECTRONIC PROGRAMMABLE WALL THERMOSTATS



TH110

TH106

TH115

part	model	description	volts	amps
08161	TH110-DP-P	electronic programmable double pole, retail pack	240/208	16
08160	TH106	electronic programmable single pole	240/208/120	16.7
08165	TH115A-240-D-B	electronic programmable double pole	240/208	15

# ELECTRONIC NON-PROGRAMMABLE WALL THERMOSTATS



TH401

TH114

part	model	description	volts	amps
72838	TH401	electronic non-programmable single pole	240/208/120	10.4
08162	TH114-A-240-D	electronic non-programmable double pole	240/208	16

# MECHANICAL WALL THERMOSTATS



T410 White

T410 Almond

T410 Taupe

white		almond		taupe		description	volts	amps
part	part	part	model	part				
08121			T410A		non-programmable single pole, 40°F to 80°F, retail pack	240/208/120	22	
08122			T410B		non-programmable double pole, 40°F to 80°F, retail pack	240/208/120	22	
72801			T410A		non-programmable single pole, 40°F to 80°F	240/208/120	22	
72802			T410B		non-programmable double pole, 40°F to 80°F	240/208/120	22	
			72821	T410A	non-programmable single pole, 40°F to 80°F	240/208/120	22	
			72822	T410B	non-programmable double pole, 40°F to 80°F	240/208/120	22	
			72830	T410A	non-programmable single pole, 40°F to 80°F	240/208/120	22	
			72831	T410B	non-programmable double pole, 40°F to 80°F	240/208/120	22	



# softHEAT


Gentle, fluid heat for the people you love most

- Smart design helps reduce indoor allergen effects
- Hydronic heat installs easily with no plumbing required

dimensions: 9-1/2" h x 3-1/4" d x various lengths

\*Add suffix W or WS to model to designate color

All models require a thermostat

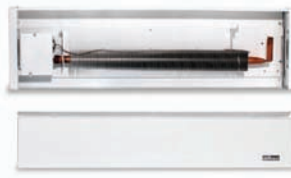

white part	white sand part	*model	description	watts	volts	amps	btus	wt/lbs
13162	13151	EBHN500-8	35" hydronic baseboard	500	208	2.4	1710	12
13163	13152	EBHN750-8	47" hydronic baseboard	750	208	3.6	2560	17
13164	13153	EBHN1000-8	59" hydronic baseboard	1000	208	4.8	3415	22
13165	13154	EBHN1250-8	71" hydronic baseboard	1250	208	6.0	4265	27
13166	13156	EBHN1500-8	83" hydronic baseboard	1500	208	7.2	5120	31
13157	13100	EBHN500	35" hydronic baseboard	500/375	240/208	2.1/1.8	1710/1280	12
13158	13101	EBHN750	47" hydronic baseboard	750/563	240/208	3.1/2.7	2560/1925	17
13359	13102	EBHN1000	59" hydronic baseboard	1000/750	240/208	4.2/3.6	3415/2560	22
13160	13103	EBHN1250	71" hydronic baseboard	1250/937	240/208	5.2/4.5	4265/3200	27
13161	13104	EBHN1500	83" hydronic baseboard	1500/1125	240/208	6.3/5.4	5120/3840	31
13170	13132	EBKN	built-in thermostat kit, double pole, 40°F to 85°F		240/208	25		1

Standard models are left hand wire only. All models available special order as right hand wire.

## ELECTRIC BASEBOARD

Sensible, quiet heat starts here

- Ideal for new construction and built to last
- Proven construction maximizes surface area and funnels heated air

dimensions: 6-3/4" h x 2-1/2" d x various lengths

\*Add suffix W or A to model to designate color

All models require a thermostat

Accessories below



white part	almond part	*model	description	watts	volts	amps	btus	wt/lb
05530	05520	2F500-1	30" baseboard	500	120	4.2	1710	6
05532	05522	3F750-1	36" baseboard	750	120	6.3	2560	7
05534	05524	4F1000-1	48" baseboard	1000	120	8.3	3415	9
05536	05526	6F1500-1	72" baseboard	1500	120	12.5	5120	12
11924	11918	2F500-8	30" baseboard	500	208	2.4	1710	6
11934	11938	3F750-8	36" baseboard	750	208	3.6	2560	7
11944	11948	4F1000-8	48" baseboard	1000	208	4.8	3415	9
11954	11958	5F1250-8	60" baseboard	1250	208	6.0	4265	10
11964	11968	6F1500-8	72" baseboard	1500	208	7.2	5120	12
11984	11988	8F2000-8	96" baseboard	2000	208	9.6	6825	16
10924	11990	8F2500-8	96" baseboard	2500	208	12.0	8530	18
09949	06501	2F350	24" baseboard	350/262	240/208	1.5/1.3	1195/895	5
09950	06502	2F500	30" baseboard	500/375	240/208	2.1/1.8	1710/1280	6
09952	06508	3F750	36" baseboard	750/563	240/208	3.1/2.7	2560/1925	7
09954	06509	4F1000	48" baseboard	1000/750	240/208	4.8/3.6	3415/2560	9
09955	06510	5F1250	60" baseboard	1250/937	240/208	5.2/4.5	4265/3200	10
09956	06511	6F1500	72" baseboard	1500/1125	240/208	6.3/5.4	5120/3840	12
09958	06513	8F2000	96" baseboard	2000/1500	240/208	8.3/7.2	6825/5120	16
09960	06515	8F2025	96" baseboard	2500/2000 1875/1500	240 208	10.4/8.3 9.0/7.2	8530/6825 6400/5120	18
03360	03358	8F2500	96" baseboard	2500/1875	240/208	10.4/9.0	8530/6400	18

## BUILT-IN BASEBOARD ACCESSORIES

\*Add suffix W or A to model to designate color



white part	almond part	*model	description	volts	amps
03400		SBFT2	Smartbase built-in thermostat kit, electronic programmable, double pole, 40°F to 85°F, retail pack	240/208	12.6
08734	03365	BTF2	built-in thermostat kit, double pole, retail pack, 40°F to 85°F	240/208/120	25
14925	14920	BTF2	built-in thermostat kit, double pole, 40°F to 85°F	240/208/120	25
08732	03366	BTF1	built-in thermostat kit, single pole, retail pack, 40°F to 85°F	240/208/120	25
14915	14910	BTF1	built-in thermostat kit, single pole, 40°F to 85°F	240/208/120	25
14963	14960	LTF240	built-in load transfer switch kit	240	
14902	14900	BRF12	built-in receptacle plate, requires separate supply wire	120	
14932	14930	BTF1TP	built-in thermostat kit single pole tamper proof, 40°F to 85°F	240/208/120	25
14942	14940	BTF2TP	built-in thermostat kit double pole tamper proof, 40°F to 85°F	240/208/120	25
14971	14970	BLF1	built-in corner connector, inside or outside 90°		
11030		MTX	mounting tool for baseboard installation		

# How to Order

1. Determine square feet by multiplying room width by room length.
2. Find recommended watts from chart.
3. Choose from baseboard or wall heater styles.
4. Select your thermostat or accessories if needed.

room sq. ft.	heater wattage
50	500
100	750
150	900
175	1000
200	1500
250	1500
275	1600
300	2000
350	2000
400	3000
500	3000
750	4000
1000	4000

THIS CHART IS FOR ESTIMATE PURPOSES ONLY.

Lots of windows?  
Increase wattage by 50%. Exact square footage not listed?  
Colder climate?  
Higher altitude?  
Choose next highest wattage.

For more in depth heat loss calculation for your room, please visit our website at [www.cadetheat.com/product-selection](http://www.cadetheat.com/product-selection)

## Made for your family, built by ours

The comfort of your home begins at our home in the Pacific Northwest. Every Cadet heater is designed, developed and manufactured at our facilities in Vancouver, Washington, USA. It's been that way since we started making heaters back in 1957. We're a family-run business, so it's simple: we build the heaters that we'd want to keep our families comfortable and safe.

The finest heaters. The best price. Built here in the USA.

## Some things are worth doing right.



All heaters  or 

All thermostats  and/or  with one-year warranty

toll free 855-CADETUS  
[cadetheat.com](http://cadetheat.com)